



Liebert® ITON™

600VA CX



## *Best in class power protection and back up technologies for Offices and Home*


The Liebert® ITON™ 600VA CX is an economical line-interactive UPS that offers full-featured power protection for home or small office computers and electronic equipment. With its unique features and extraordinary performance not normally found in similar products in range.

### Features and Benefits

- Excellent microprocessor control guarantees high reliability
- AVR boost and buck for voltage stabilisation
- Auto restart while AC is recovering
- Simulated sine wave
- Auto charging at Off-mode
- Cold start function
- Generator compatible



Liebert® ITON™ 600VA CX

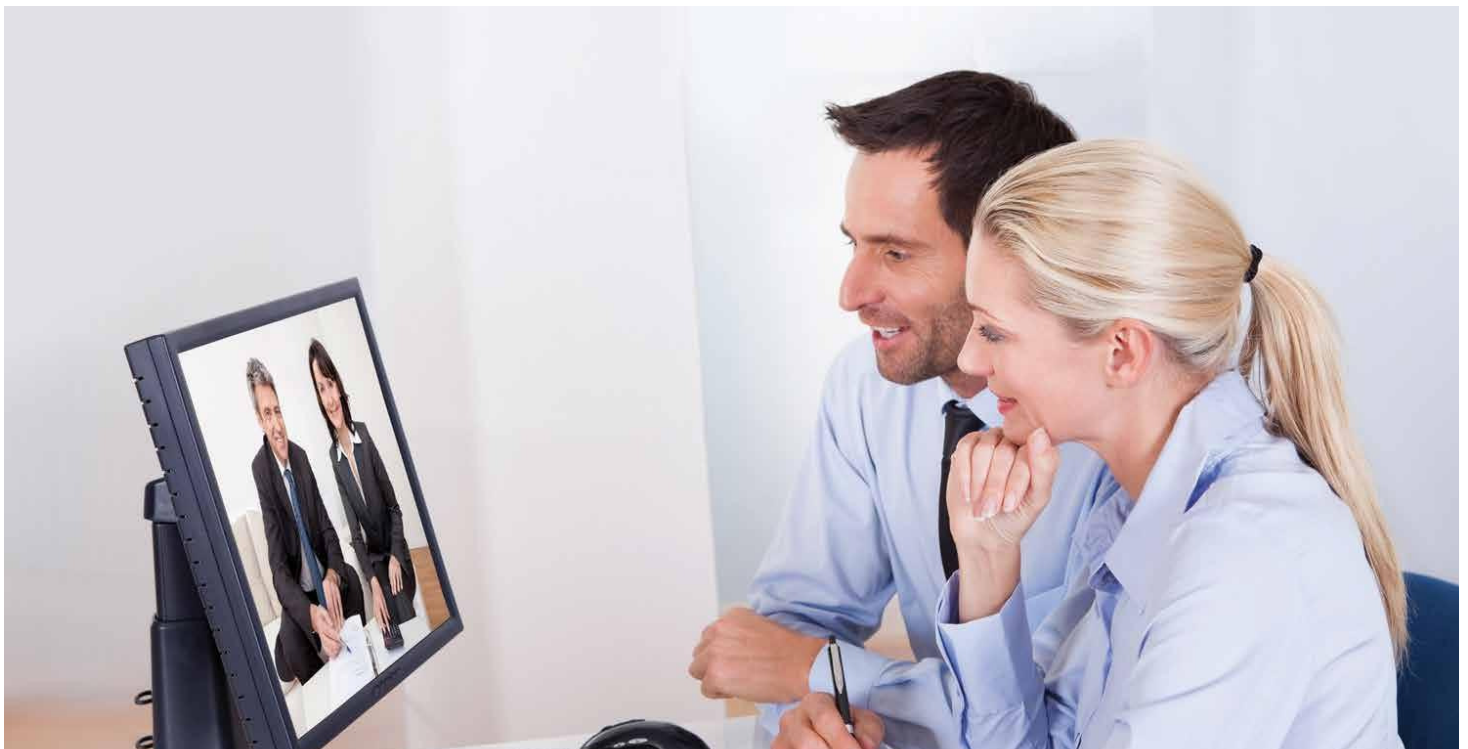

## Technical Specifications

Model	Specification	600VA CX
<b>Capacity</b>	VA/W	600 VA/360 Watt.
<b>Input</b>	Voltage	220/230 VAC
	Voltage Range	140-300 VAC
	Frequency Range	50 Hz
<b>Output</b>	AC Voltage Regulation (Batt. Mode)	±1%
	AC voltage regulation (AC mode)	±10%
	Frequency Range (Batt. Mode)	50 Hz ±1 Hz
	Transfer Time	Typical 2-6 ms
	Waveform (Batt. Mode)	Simulated Sine Wave
	Overload	110% +/-10% Shutdown after 5 mins
<b>Battery</b>	Battery Type & Number	12 V/7 Ah x 1
	Typical Recharge Time	6-8 hours up to 90% capacity
	Back up time on 1 PC load (120W)	15 min
<b>Transfer Time</b>	Minimum line break for transfer to battery	Typical 4-8 msec
<b>Indicators</b>	AC Mode	Green lighting
	Battery Mode	Green flashing
	Fault	Red lighting
<b>Alarms</b>	Battery Mode, Low Battery, Overload, Battery replacement, fault	Audible alarm is provided
<b>Protection</b>	Full Protection	Overload, discharge, and overcharge protection
<b>Physical</b>	Dimension, D X W X H (mm)	279 X 101 X142
	Net Weight (kgs)	4.2
<b>Environment</b>	Operating Environment	0- 40°C
	Storage Temp	-15°C to 50°C
	Humidity	0-95 % RH @ 0- 40°C (non-condensing)
	Noise Level	Less than 40dB

\* Product specifications are subject to change without further notice

\*Battery run time may vary depending upon load.

